



Technical


Bulletin

“Response Lite Kit” Fire Rated Wood Bead Offering

Replaces Volume 9 Number T-32

Available for immediate orders, Mohawk introduces the most user friendly, highest quality wood bead system for fire rated doors in the industry. The first of its kind, Mohawk’s Response Lite Kits utilize solid lumber wood for improved finishing and durability with **no glazing compounds required!** Specifying Mohawk’s Response Kit ensures the highest quality fire rated system without the concern of ongoing field maintenance.

- **NO VENEER - ALL SOLID LUMBER**
- **NO VISIBLE NAIL HOLES**
- **NO GLAZING COMPOUND**

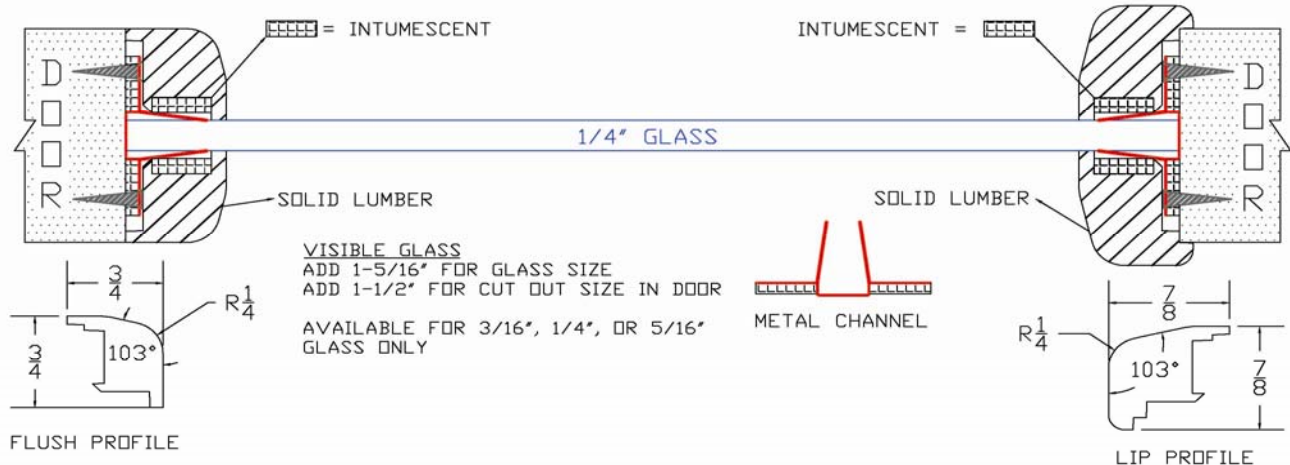

Maximum Lite Size	20 Minute: 1,296 sq/in maximum. Visible glass not to exceed 31" width or 54" in height
Maximum Lite Size Mineral Core	45 Minute: 1,296 sq/in maximum. Visible glass not to exceed 31" width or 54" in height 60 Minute: 100 sq/in maximum. Visible glass minimum 2 1/2" 90 Minute: 100 sq/in maximum. Visible glass minimum 2 1/2"
Maximum Lite Size Agri-Fiber & Wood Particle	45 Minute: 1,296 sq/in maximum. Visible glass not to exceed 31" width or 54" in height
Stop Material	Flush or Lip Solid Lumber with "built-in" intumescent engineering design.
Listing	Intertek Testing Services – Warnock Hersey International – Neutral Pressure, Positive Pressure Category A & Category B
Species	Wide variety of wood species compatible to the face veneer.
Installation	Factory Installation of Glass and Kit Required. 1/4" glass – standard.