

PLATINUM SERIES
5-Ply Architectural Flush Doors
AWI Premium Grade Construction
PC-5 Particle Core

Construction

Faces: Virtually any domestic or exotic species with Hardwood crossbands. Wood grain perpendicular to the face veneer for added structural integrity and stability.

Veneer Grade: AWI "AA" Grade-Center Balance Match. "A" Book and Running by special request.

Construction Grade: AWI—Premium


Cores: LD-1 or LD-2 compliant with ANSI 208.1. Available in 20 minute ratings.

Vertical Edges: Matching conforming to AWI Quality Standards.

Horizontal Edges: Wood—Conforming to AWI Quality Standards.

Adhesive: Type 1 Bond in both veneer and component assembly.

Finishes: Opaque and Transparent—Conforming AWI 1500 Premium Acrylated UV Curable Epoxy. Also available with Mohawk's exclusive DigiTech (digital technology) with UV topcoat.

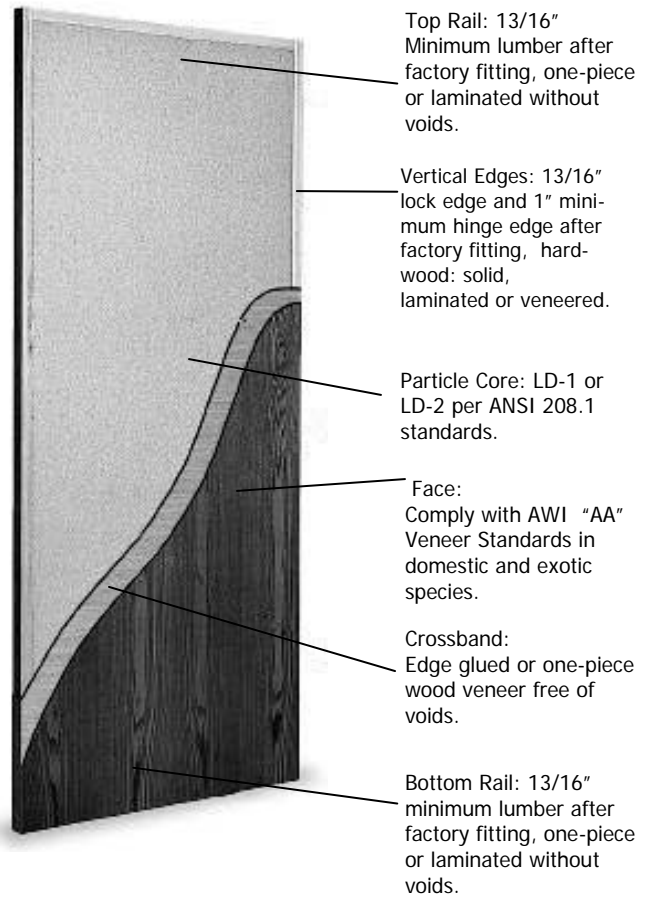

Please see our Fire Door Matrix specification page for additional construction requirements and hardware application approvals.

- Lifetime Warranty
- Security Rating - 40
- LEED Credit Options:
MR 4.1, 4.2, & 5.1
EQ 4.2
- * AWI Certification by request.

Quality Standards

Quality Assurance / Industry Standards:
AWI Premium Grade.

Applications: Architectural Projects that require 5-ply construction.

Maximum Size: 4/0 X 9/0—see fire door matrix for label size restrictions.

Thickness: Non-rated 1 3/8" and 1 3/4" 20 minute - 1 3/4" only

Construction: Stiles and rails securely bonded to the core and abrasively planed prior to veneering.